


Adaptec SATA & SAS RAID Family

5405, 5445, 5805, 5085, 51245, 51645, 52445



Next-generation Unified Serial™ Controllers Deliver Performance for High-Capacity SATA Drives and High-End SAS Drives

Adaptec next-generation Unified Serial controllers deliver both high I/O transaction and high bandwidth processing for use with cost-effective, high-capacity Serial ATA (SATA) disk drives or high-performance Serial Attached SCSI (SAS) drives, or both attached to the same controller. With an industry-leading dual core RAID on Chip (ROC), DDR2 533MHz write cache, support for up to 256 SATA/SAS devices (using SAS expanders), and an x8 PCI express host interface bus connection, this family of Adaptec Unified Serial controllers delivers impressive performance numbers — over 250,000 I/Os and 1.2GB/s. These controllers are ideal for enterprise-class storage applications that call for maximum performance, scalability and flexibility.


Advanced data protection

Designed to provide maximum performance and reliability, Adaptec RAID Code (ARC), available with Adaptec hardware RAID controllers, offers RAID levels 0, 1, 1E, 5, 5EE, 6, 10, 50 and 60. ARC also offers features such as **RAID Level Migration** (the ability to easily migrate RAID levels), **Online Capacity Expansion** (expand capacity without powering down the server), and **Copyback Hot Spare** (when a failed drive has been replaced, data is automatically copied from the hot spare back to the restored drive, allowing the hot spare to remain in the same spot). ARC supports array sizes up to 512TB — taking advantage of new, higher-capacity disk drives and modern operating systems.

One-view storage management

This Adaptec Unified Serial RAID family operates under Adaptec Storage Manager™, a one-view tool that centralizes management of all Adaptec RAID products. The software enables remote configuration and

monitoring of RAID arrays through secure, encrypted communications. The intuitive management tool simplifies RAID array creation and management with pop-up tips and online help.

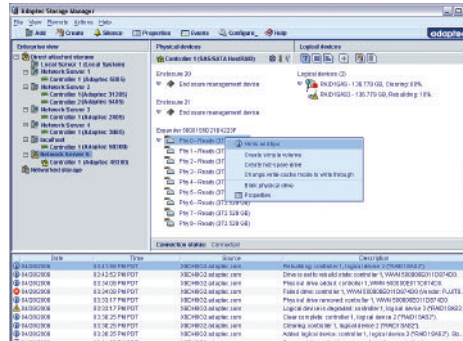

Broad operating system support

Extensive operating system support includes all major software releases, such as Windows, Linux, FreeBSD, and UNIX. The latest operating system drivers are available on the Adaptec support website, www.adaptec.com/support. The Adaptec unified driver model for Linux operating systems allows the new Unified Serial controllers to install with all Adaptec Open Source Linux drivers included in the standard Linux kernel since version 2.4.2.

Compatibility, reliability, and support

Adaptec has been delivering storage and I/O solutions for more than 25 years. In fact, Adaptec is the undisputed RAID leader; no other vendor's technology is more proven. This Adaptec RAID Unified Serial family has been extensively tested with third-party components to deliver the utmost in compatibility. The cards are backed by a 3-year warranty and legendary Adaptec technical support.

Product Highlights

SATA 1.2GHz Dual Core RAID on Chip (ROC)

- High-performance RAID 5/6
- Up to 512MB DDR2 cache

Internal and External SATA/SAS connectors

4- and 8-port low-profile MD2 form factor

12-, 16- and 24-port half length form factors

Supports up to 256 SATA or SAS devices using SAS expanders

3Gb/s throughput at each drive port

x8 PCI Express host interface

Supports multiple RAID LUNs

Enclosure management support via LED header and



Adaptec SATA & SAS RAID Family

Adaptec Unified Serial Controller Family	
Why to buy?	Performance Unified Serial RAID controllers support both SATA and SAS devices. Ideal for bandwidth intensive storage applications; NAS, online transaction processing servers (OLTP), web servers, digital surveillance and stream applications.
Customer Needs	High I/O transaction and high bandwidth processing
RAID Features	<ul style="list-style-type: none"> • Supports up to 256 SATA or SAS devices using SAS expanders • RAID levels 0, 1, 1E, 5, 5EE, 6, 10, 50 and 60 • Quick initialization • Supports multiple RAID LUNs • Online Capacity Expansion • Copyback Hot Spare • Dynamic caching algorithm • Native Command Queuing (NCQ) • Background initialization • Hot-plug drive support • RAID Level Migration <ul style="list-style-type: none"> • Hot spares – global, dedicated, and pooled • Automatic/manual rebuild of hot spares • SAF-TE enclosure management • Configurable stripe size • S.M.A.R.T. support • Multiple arrays per disk drive • Open stripe table • Dynamic sector repair • Staggered drive spin-up • Bootable array support • Optimized Disk Utilization
Management Utilities	<p>Adaptec Storage Manager™ (ASM)</p> <ul style="list-style-type: none"> • Java-based GUI Management Utility • Remote configuration, monitoring and notification • ASM OS Support: Windows, Linux, SCO, Solaris, • Microsoft VDS Support • SNMP, SMTP • Remote firmware updates <p>ARCCONF</p> <ul style="list-style-type: none"> • Command Line Interface <p>Adaptec BIOS Configuration Utility (ACU)</p> <ul style="list-style-type: none"> • BIOS level configuration utility • Flashable BIOS support
Operating System	Windows XP, Server 2003/2008, Vista, Red Hat Enterprise Linux (RHEL), SUSE Linux Enterprise Server (SLES), SCO OpenServer, UnixWare, Sun Solaris 10 x86, FreeBSD
Physical Dimensions	5085/5405/5445/5805 2.5"H x 6.6"L (167mm x 64mm) 51245/51645/52445 4.6"H x 6.6"L (167mm x 116mm)
Operating Temperature (incl. battery)	0°C to 45°C (without airflow) 0°C to 55°C (with airflow)
Operating Voltage	1 amp @ 3.3V
Regulatory Certification	CE, FCC, UL, C-tick, VCCI
MTBF	873,402 hours at 40°C
Warranty	3 years
Accessories	Adaptec Battery Module 800 (2248000-R)

Adaptec RAID	5405	5445	5805	5085	51245	51645	52445
Order Part Number	2258100-R (kit)	2228800-R (kit)	2244100-R (kit)	2249100-R (kit)	2258300-R (kit)	2258500-R (kit)	2258700-R (kit)
Form Factor	MD2 - Low Profile	MD2 - Low Profile	MD2 - Low Profile	MD2 - Low Profile	Half Length/ Full Height	Half Length/ Full Height	Half Length/ Full Height
Ports	4	4+4	8	8	12+4	16+4	24+4
Connectors	1 SFF-8087 (int.)	1 SFF-8087 (int.) 1 SFF-8088 (ext.)	2 SFF-8087 (int.)	2 SFF-8088 (ext.)	3 SFF-8087 (int.) 1 SFF-8088 (ext.)	4 SFF-8087 (int.) 1 SFF-8088 (ext.)	6 SFF-8087 (int.) 1 SFF-8088 (ext.)
Bus Interface	8-Lane PCIe	8-Lane PCIe	8-Lane PCIe	8-Lane PCIe	8-Lane PCIe	8-Lane PCIe	8-Lane PCIe
Processor	1.2 GHz Dual Core	1.2 GHz Dual Core	1.2 GHz Dual Core	1.2 GHz Dual Core	1.2 GHz Dual Core	1.2 GHz Dual Core	1.2 GHz Dual Core
Cache	256MB	512MB	512MB	512MB	512MB	512MB	512MB



adaptec

Adaptec, Inc.
691 South Milpitas Boulevard
Milpitas, California 95035
Tel: (408) 945-8600
Fax: (408) 262-2533

World Wide Web: www.adaptec.com
Pre-Sales Support: US and Canada: 1 (800) 442-7274 or (408) 957-7274
Pre-Sales Support: Europe: Tel: (44) 1276-854-500 or Fax: (44) 1276-854-505

Copyright 2008 Adaptec, Inc. All rights reserved. Adaptec, the Adaptec logo, Storage Manager, and Storage Manager Pro are trademarks of Adaptec, Inc., which may be registered in some jurisdictions. Microsoft, Windows, Windows NT, and Windows 2000, are registered trademarks of Microsoft Corporation, used under license. All other trademarks used are owned by their respective owners.

Information supplied by Adaptec Inc., is believed to be accurate and reliable at the time of printing, but Adaptec Inc., assumes no responsibility for any errors that may appear in this document. Adaptec, Inc., reserves the right, without notice, to make changes in product design or specifications. Information is subject to change without notice.