




## Compact Power Supply

Our power supply features OMRON's new and unique under-voltage alarm function and its compact body contributes to machine downsizing.

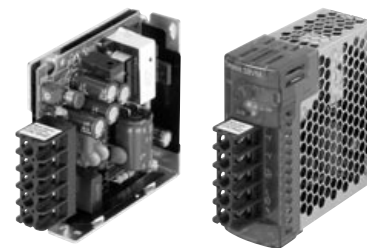

S8VM series

### Features ▶

- Under-voltage alarm function
- 15W to 1,500W models
- Finger protection prevents electric shock
- Approvals: IL, cUL, UL508 listed, CE, Class 1 Div 2, and DEMI F47
- Open frame type and mounting brackets available

### Benefits ▶

- Compact size
- Uniform height
- New design prevents screws from falling out

### Applications ▶

- Semiconductor wafer production
- Continuous production processes
- Robotics in the automotive industry
- Panel and machine builders
- Food and beverage industry

### Product Specifications ▶

Part Number	Power Ratings (W)	Dimensions (H x W x D) mm (inches)	Type	Output (V)	Output Current (A)
S8VM-01505CD	15	84.5 x 33.5 x 84.5 (3.33 x 1.32 x 3.32)	DIN-rail, covered, AC100-240 VAC input	5	3
S8VM-01512CD			DIN-rail, covered, AC100-240 VAC input	12	1.3
S8VM-01524AD			DIN-rail, covered, with undervoltage alarm, AC100-240 VAC input	24	0.65
S8VM-01524CD			DIN-rail, covered, AC100-240 VAC input	24	0.65
S8VM-03005CD	30	84.5 x 33.5 x 99.5 (3.33 x 1.32 x 3.92)	DIN-rail, covered, AC100-240 VAC input	5	6
S8VM-03012CD			DIN-rail, covered, AC100-240 VAC input	12	2.5
S8VM-03024AD			DIN-rail, covered, with undervoltage alarm, AC100-240 VAC input	24	1.3
S8VM-03024CD			DIN-rail, covered, AC100-240 VAC input	24	1.3
S8VM-05005CD	50	84.5h x 33.5 x 124.5 (3.33 x 1.32 x 4.90)	DIN-rail, covered, AC100-240 VAC input	5	10
S8VM-05012CD			DIN-rail, covered, AC100-240 VAC input	12	4.3
S8VM-05024AD			DIN-rail, covered, with undervoltage alarm, AC100-240 VAC input	24	2.2
S8VM-05024CD			DIN-rail, covered, AC100-240 VAC input	24	2.2
S8VM-10005CD	100	84.5 x 35 x 164.5 (3.33 x 1.38 x 6.48)	DIN-rail, covered, AC100-240 VAC input	5	20
S8VM-10012CD			DIN-rail, covered, AC100-240 VAC input	12	8.5
S8VM-10024AD			DIN-rail, covered, with undervoltage alarm, AC100-240 VAC input	24	4.5
S8VM-10024CD			DIN-rail, covered, AC100-240 VAC input	24	4.5
S8VM-15005CD	150	84.5 x 44 x 164.5 (3.33 x 1.73 x 6.48)	DIN-rail, covered, AC100-240 VAC input	5	27
S8VM-15012CD			DIN-rail, covered, AC100-240 VAC input	12	12.5
S8VM-15024AD			DIN-rail, covered, with undervoltage alarm, AC100-240 VAC input	24	6.5
S8VM-15024CD			DIN-rail, covered, AC100-240 VAC input	24	6.5
S8VM-30024C	300	83.5 x 62.5 x 188 (3.29 x 1.73 x 7.4)	Covered, AC100-240 VAC input	24	14
S82Y-VM30D					
S8VM-60024C	600	83.8 x 101.8 x 192 (3.3 x 4 x 7.56)	Covered, AC100-240 VAC input	24	27
S8VM-15224C	1500	82 x 126.5 x 327 (3.23 x 4.98 x 12.87)	Covered, AC100-240 VAC input	24	65